



## ALVOLTA ANL FUSES

40A - 400A

### Key Features:



Suitable for 12-48V  
Systems




Secure Bolt-in  
Connection



Fuse Inspection  
Window



Premium Copper Alloy



Various Sizes Available

### Suitable for:



**3 YEAR**  
WARRANTY

# ALVOLTA ANL FUSES

## 40A - 400A



### Specifications:

Model	ANL040	ANL050	ANL060	ANL080	ANL100	ANL125	ANL150	ANL200	ANL225	ANL250	ANL300	ANL400
Amperage	40A	50A	60A	80A	100A	125A	150A	200A	225A	250A	300A	400A
Voltage Rating	80V DC or Less											
Interrupting Voltage	2000A at 80V DC											
Typical Voltage Drop	125mV											
Mounting Torque	11-12 N.m											
Housing Material	Ceramic											
Terminal	Copper Alloy											
Operating Temperature	-40°C to +125°C											
Colour	Silver											
Compliance	ISO 8820-5 / GB/T31465.5 / UL284											
Dimensions	82 x 20 x 10mm											

### Time-Current Specifications:

Test Current	Opening Time	
	Min.	Max.
160%	60 s	-
220%	-	60 s
250%	0.8 s	10 s
400%	0.2 s	2 s

### Model Diagram:

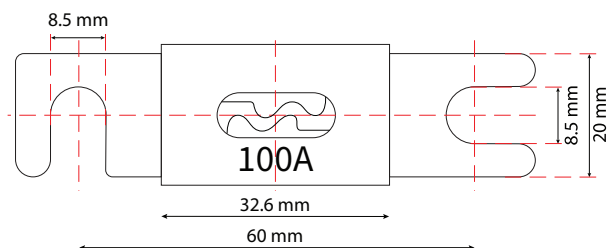

\*All data and specifications provided in this datasheet are tested under standard test conditions, and may deviate marginally from actual values. Alvolta and its associates reserve the right to make modifications to the provided information without notice. Alvolta maintains the goal to supply customers with the most recent information regarding its products.