ALVOLTA
BUILT FOR POWER



ALVOLTA 32MM RIGID HEAVY-DUTY SOLAR CONDUIT 4M

ALV-HDC324

Key Features:

- Protects Solar System Cables
- UV Resistant
- Easy Installation
- Meets AS/NZS Industry Standards
- Durable Design

Suitable for:

1 YEAR WARRANTY


ALVOLTA 32MM RIGID HEAVY-DUTY SOLAR CONDUIT 4M

ALV-HDC324

Specifications:

General	
Outer Diameter	32mm
Conduit Thickness	3mm
Material	PVC
Ingress Protection	IP00
Fire Resistance	UL94-V0
UV Resistance	UV Resistance
Operating Temperature Range	-5°C - +60°C
Operating Humidity Range	5% - 90% Relative humidity (no condensing)
Length	4m
Colour	Grey
Warranty	1 Year
Standards	
Aus/NZ	AS/NZS 61386
RoHS	The European Directive 2011/65/EU RoHS Compliance
REACH	The European Union Directive 1907/2006/EC Compliance

Module Diagram:

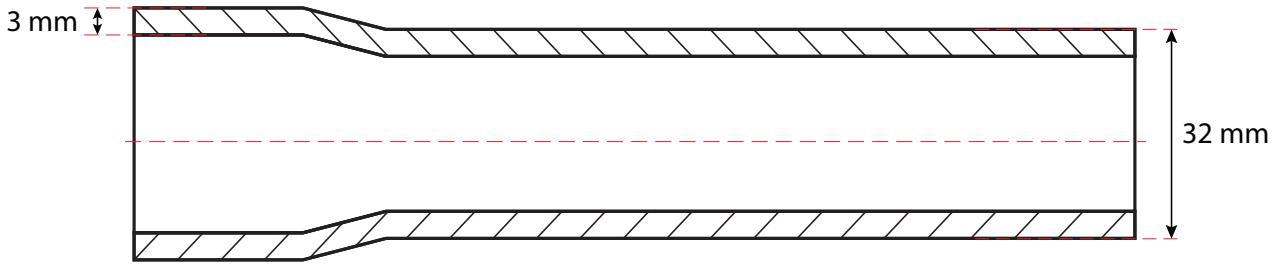

*All data and specifications provided in this datasheet are tested under standard test conditions, and may deviate marginally from actual values. Alvolta and its associates reserve the right to make modifications to the provided information without notice. Alvolta maintains the goal to supply customers with the most recent information regarding its products.