



ALVOLTA HEAVY DUTY 12V 200A IGNITION RELAY

AR12200

Key Features:



M6 Terminal Studs



Male Lucar Terminals



200A Switching Current



Easy Installation



Durable Design

Suitable for:















ALVOLTA HEAVY DUTY 12V 200A IGNITION RELAY AR12200

Specifications:					
Max. Switching Voltage	40V DC				
Max. Switching Current	200A				
Max. Switching Power	1680				
Contact Resistance Rating	120A at 14V DC / 100A at 28V DC				
Number of Terminals	4				
Stud Terminals	2x M6 Studs				
Lucar Terminals	2x 6.3mm Male Lucar				
Mounting Hole Size	6mm				
Dielectric Strength	50Hz 500V				
Shock Resistance	147m/s²				
Housing Material	ABS Plastic				
Terminal Material	Silver Tin-Oxide				
Operating Temperature	-40°C to +85°C				
Colour	Black				
Compliance	IEC 61810-7				
Dimensions	55 x 88 x 57mm				
Weight	0.94kg				

Coil Specifications:							
Dash Numbers		12V 2.4W	24V 2.4W	12V 4.8W	24V 4.8W		
Coil Voltage	Rated	12	24	12	24		
	Maximum	15.6	31.2	15.6	31.2		
Coil Resistance (Q+10%)		60	240	30	120		
Pickup Voltage		7.8	15.6	7.8	15.6		
Release Voltage		1.2	2.4	1.2	2.4		
Coil Power		2.4W	2.4W	4.8W	4.8W		


WWW.ALVOLTA.COM.AU BUILT FOR POWER

^{*}All data and specifications provided in this datasheet are tested under standard test conditions, and may deviate marginally from actual values. Alvolta and its associates reserve the right to make modifications to the provided information without notice. Alvolta maintains the goal to supply customers with the most recent information regarding its products.




ALVOLTA HEAVY DUTY 12V 200A IGNITION RELAY AR12200

Module Diagram:

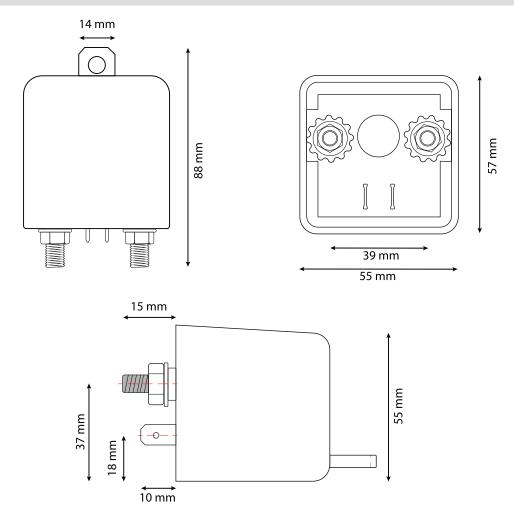

Wiring Diagram:



WWW.ALVOLTA.COM.AU BUILT FOR POWER